

99-726 NON-DETECTED PUSH SIDE MOUNT / 99-626 DETECTED PUSH SIDE MOUNT

**Application**

- Used with independent closers
- Non-handed
- For doors 2'8" to 4'0" (non-detected) 3'0" to 4'0" (detected)

ANSI/C00511/C00521




99-626 shown

**Product Description & Features**

- Surface mounted
- Single acting
- Sprayed finishes
- 85° - 110° hold open
- Push side
- Detected or non-detected
- Surface or concealed wiring
- Holding force 25-35 lbs.
- When used in conjunction with detected model, unit must be 24VDC

**Technical Information**

- Non-detected 120VAC / 24VAC/DC 90mA
- 120VAC / 24VAC/DC 106mA standby 125mA alarm

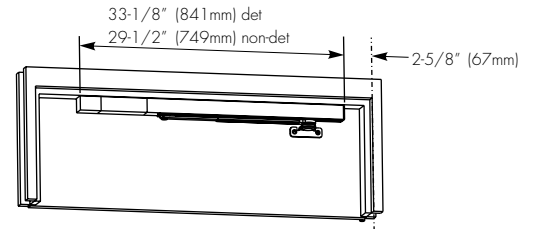

99-926 NON-DETECTED PULL SIDE MOUNT / 99-826 DETECTED PULL SIDE MOUNT

**Application**

- Used with independent closers
- Non-handed
- For doors 2'8" to 4'0" (non-detected) 3'0" to 4'0" (detected)

ANSI/C00471/C00481




99-926 shown

**Product Description & Features**

- Surface mounted
- Single acting
- Sprayed finishes
- 85° - 110° hold open
- Pull side
- Detected or non-detected
- Surface or concealed wiring
- Holding force 25-35 lbs.
- When used in conjunction with detected model, unit must be 24VDC

**Technical Information**

- Non-detected 120VAC / 24VAC/DC 90mA
- Detected 120VAC/24VAC/DC 106mA standby 125mA alarm

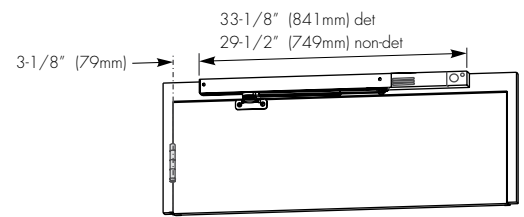

HOW TO ORDER

